



**Eur päisches
Patentamt**

**Eur pean
Patent Office**

**Office européen
des brevets**

Bescheinigung

Certificate

Attestation

Die angehefteten Unterla-
gen stimmen mit der
ursprünglich eingereichten
Fassung der auf dem näch-
sten Blatt bezeichneten
europäischen Patentanmel-
dung überein.

The attached documents
are exact copies of the
European patent application
described on the following
page, as originally filed.

Les documents fixés à
cette attestation sont
conformes à la version
initialement déposée de
la demande de brevet
européen spécifiée à la
page suivante.

Patentanmeldung Nr. Patent application No. Demande de brevet n°

02360234.5

Der Präsident des Europäischen Patentamts;
Im Auftrag

For the President of the European Patent Office

Le Président de l'Office européen des brevets
p.o.

R C van Dijk

DEN HAAG, DEN
THE HAGUE, 18/11/02
LA HAYE, LE



**Europäisches
Patentamt**

**European
Patent Office**

**Office européen
des brevets**

**Blatt 2 der Bescheinigung
Sheet 2 of the certificate
Page 2 de l'attestation**

Anmeldung Nr.:
Application no.:
Demande n°: **02360234.5**

Anmeldetag:
Date of filing:
Date de dépôt: **06/08/02**

Anmelder:
Applicant(s):
Demandeur(s):
ALCATEL
75008 Paris
FRANCE

Bezeichnung der Erfindung:
Title of the invention:
Titre de l'invention:
Adaptive chromatic dispersion compensator

In Anspruch genommene Priorität(en) / Priority(ies) claimed / Priorité(s) revendiquée(s)

Staat:
State:
Pays:

Tag:
Date:
Date:

Aktenzeichen:
File no.
Numéro de dépôt:

Internationale Patentklassifikation:
International Patent classification:
Classification internationale des brevets:

/

Am Anmeldetag benannte Vertragsstaaten:
Contracting states designated at date of filing: **AT/BE/CH/CY/DE/DK/ES/FI/FR/GB/GR/IE/IT/LI/LU/MC/NL/PT/SE/TR**
Etats contractants désignés lors du dépôt:

Bemerkungen:
Remarks:
Remarques:

Applicant:

Alcatel
54 rue la Boétie
75008 Paris
5 France

Stuttgart, 31.07.2002

A183EP B/P
113 548

Representative:

Kohler, Schmid + Partner
10 Patentanwälte GbR
Ruppmannstraße 27
D-70565 Stuttgart

15

Adaptive chromatic dispersion compensator

20 Background of the invention

The invention relates to an integrated chromatic dispersion compensator for optical signals in optical communication networks, comprising a plurality of cascaded stages of optical dispersion elements arranged in the form of a lattice
25 filter structure.

An integrated chromatic dispersion compensator of this type was described by K. Takiguchi, S. Kawanashi, H. Takara, A. Himeno and K. Hattori in J. Lightwave Technol. Vol. 16, No. 9, 1998, p. 1647-1656.

5 Optical communication networks have increased in importance since the transmission of large amounts of data over long distances, in particular via the internet, has become popular.

Digital data transfer via optical communication networks is based on
10 electromagnetic waves of a center frequency on the order of 195 THz carrying a modulation which contains the data to be transmitted. The typical bandwidth of such a modulation is about 40 GHz in a 40 Gbit/s DWDM (wavelength division multiplex) system. The light waves are transferred through optical waveguides, such as glass fibers.

15 However, the effective refractive index of standard waveguide is frequency dependent due to material dispersion and waveguide dispersion. This means that high frequency parts and low frequency parts of the electromagnetic wave propagate through the waveguide at different speeds (group velocity). This
20 effect is called chromatic dispersion and causes time separations between parts of the same data channel. In the example above, a transmission distance of 100 km causes a time separation of about 240 ps between the low frequency part and the high frequency part of the modulated electromagnetic wave. Since the length of one information bit is only about 25 ps, dispersion may damage
25 the information contained in the data channel.

To overcome this problem, optical communication networks are equipped with dispersion compensators. These are intended to undo chromatic dispersion effects.

30

One type of dispersion compensator is based on chirped fiber Bragg grating (CFBG) as described in the Technical Digest of the Optical Fiber Communication Conference and Exhibit, March 17-22, 2002, Anaheim, California, page 577ff; T. Sugihara et al., Paper ThAA2. The electromagnetic

5 wave is sent into fiber with a refractive index grating written into the core region of the fiber. The grating period of the fiber decreases (or increases) along the fiber. The location of reflection (Bragg reflection) of a specific frequency part of the wave is dependent on said grating period. Low frequency parts are reflected later (earlier), whereas high frequency parts are reflected earlier (later) and

10 must propagate through the dead end fiber for a longer time. Through Peltier elements exploiting thermal expansion of the material between the mirror planes, CFBG compensators may be adapted to a specific dispersion situation. This involves the optimization of 1 or 2 temperature parameters. However, a CFBG compensator only works for one data channel. Therefore, dispersion

15 compensation for a waveguide that normally transmits a multitude of data channels (typically 32 with a spacing of 100 GHz) requires the separation of these channels into separate fibers and one CFBG compensator component for each channel. This means very costly procedures and constructions, in particular requiring plenty of rack space in central offices due to the large

20 dimensions of one CFBG compensator component.

A second type of dispersion compensator is constructed as an integrated optic dispersion compensator (equalizer) on a planar light wave circuit; see K. Takiguchi et al.. It consists of cascaded Mach-Zehnder interferometers (MZI) in

25 a lattice-form optical filter design. In general, an MZI consists of two 3dB couplers connected via two waveguide arms, one containing a thermo-optic phase shifter and one containing a delay line. In general, the first coupler distributes incoming electromagnetic waves on the two waveguide arms, with the frequency spectrum in the two arms being different. The delay line causes a

30 time delay for the part of the electromagnetic wave in the corresponding arm, whereas the phaseshifter determines the interference situation in the next

coupler. Integrated optical dispersion compensators are in principle suitable for compensating the dispersion of a plurality of data channels at a time due to the repetition of the transfer characteristics with the optical frequency. However, in the state of the art there is no method available for adapting an integrated
5 optical dispersion compensator to a varying degree of dispersion.

A dispersion compensator must be adapted to the amount of dispersion of the incoming electromagnetic wave, i.e. to the waveguide. The dispersion situation at the end of a waveguide of a length on the order of some 100 km is not
10 stationary, but varies over time. The most important reason for such a variation is the temperature dependence of the refractive index of the waveguide material. In the above-mentioned example, a temperature change of 30°C in an 800 km waveguide causes a time separation of about 50 ps/nm. Other problems arise when a dispersion compensator is to be used with different
15 types of waveguides, in particular different lengths and materials. Then a fine tuning of the dispersion compensator is necessary at the installation, but usually cannot be accomplished with satisfactory accuracy for economic reasons.

20 Therefore, dispersion compensators not capable of dynamically adapting to varying dispersion situations can only accomplish a coarse compensation, with residual chromatic dispersion remaining uncompensated and increasing the bit error rate (BER) of the optical data transfer process.

25 Object of the invention

It is the object of the invention to present a compact dispersion compensator that can dynamically be adapted to varying dispersion situations and that is capable of compensating the chromatic dispersion of a multitude of data
30 channels at the same time.

Short description of the invention

This object is achieved by an integrated optical dispersion compensator mentioned in the beginning characterized by at least one tapping device
5 disposed between consecutive stages of the optical dispersion elements for tapping inter stage signals, feeding each tapped inter stage signal into a separate feedback loop, which in turn is feeding adaptation parameters into at least one of the stages of the optical dispersion elements preceding the corresponding tapping device of the inter stage signal.

10

In the invention, intermediate ("inter stage") optical signals are tapped out of the integrated chromatic dispersion compensator (ICDC) which are used for adaptation. Thus, it is not only the signal at the output port of the ICDC chip that can be used for compensation.

15

It is possible to use an inventive ICDC as the only dispersion compensating device for compensating the chromatic dispersion of a waveguide, but it can also be used as an additional device supporting a stationary dispersion compensator, eliminating the residual chromatic dispersion of said stationary
20 dispersion compensator. For this reason, the ICDC can also be referred to as a residual chromatic dispersion compensator (RCDC).

The equipment to build up the feedback loops is inexpensive. The tapped signals are typically used to adjust one phase shifter only, with adjusting
25 typically to the maximum of the optical power of the tapped signal. The optimisation of the phase of a phaseshifter controlled by a separate feedback loop can be accomplished by a simple dithering algorithm with low speed electronics and photodiodes.

30 In the most simple case, the stage being controlled by a feedback loop analysing the signals of a tapping device is the stage immediately preceding the

tapping device. This avoids undesired correlations between different feedback loops. But it is also possible to control stages farther away from the tapping device, in particular if intermediate stages between the controlled stage and the tapping device operate stationary.

5

The complete construction of the ICDC is, in accordance with the invention, integrated on one chip and thus arranged as one single device. This allows an extremely simple handling and quick installation procedure.

- 10 In a preferred embodiment of the invention, the integrated chromatic dispersion compensator comprises a plurality of tapping devices disposed between several stages of the optical dispersion elements for tapping inter stage signals. This means that the number of parameters for the dispersion compensation increases, but, on the other hand, the increased number of fit parameters
15 allows a more exact compensation of the prevailing dispersion.

- When a plurality of stages is comprised in the ICDC, there is also a plurality of parameters (in particular phases of phase shifters) to be adjusted. This bears the risk of numerous local minima or maxima that cannot be handled by a
20 simple adaptation control evaluating the output signal only. Moreover, the adaptation time grows exponentially with the number of parameters when adjusting is accomplished based merely on the output signal, so the adjusting process may become rather time consuming and complex. By adjusting each important parameter with its own feedback loop, it is excluded that the
25 adjustment process of the ICDC is trapped in a local but not global minimum or maximum of one single global feedback loop that is adjusting all parameters at the same time. Realising the invention, the adjustment time is only linearly dependent on the number of parameters. In accordance with the invention, it is also possible to adjust groups of parameters with one feedback loop each, with
30 generally a plurality of groups of parameters being adjusted independently.

In a highly preferred embodiment, the integrated chromatic dispersion compensator is characterized in that the stages of the of the optical dispersion elements comprise tuneable phaseshifters, in particular electrically and/or thermally tuneable phaseshifters. These phase shifters are simple means for
5 controlling the interference of electromagnetic waves from two waveguide arms in a coupler following the phase shifter. This interference influences the partitioning of the frequency spectrum in the next coupler, and thus influences the dispersion compensation. In a typical design of the invention, phase shifters comprise the only dynamically adaptable components of the lattice filter
10 structure; in particular, delay lines and couplers operate stationary.

In a further development of this embodiment, each feedback loop controls only one single phaseshifter, preferably a phaseshifter which is arranged in parallel to or in series with a delay element. Phaseshifters arranged in parallel or in
15 series to delay lines (note that the effect of a phase shifter is identical in both cases) are of particular importance to the chromatic dispersion compensation, so preferably all phaseshifters arranged in parallel or in series to delay lines are controlled by a separate feedback loop. In controlling only one single
phaseshifter, the feedback loop cannot get trapped in a local minimum or
20 maximum that is not identical to the absolute (global) minimum or maximum of its feedback parameter.

An advantageous embodiment of the inventive integrated chromatic dispersion compensator is characterized by a further tapping device for tapping the output
25 signal of the lattice filter structure, and feeding the tapped output signal in an additional feedback loop, and feeding adaptation parameters derived by the additional feedback loop into at least one of the stages of the optical dispersion elements preceding the further tapping device. This means, that apart from
inter stage tapping devices, a further tapping device may be placed at the
30 signal output of the ICDC, above all for controlling the stage immediately preceding the signal output of the ICDC, since this stage would else need to be

operated stationary. Thus, an even better adaptation of the dispersion compensator to the prevailing dispersion can be obtained.

In a preferred embodiment of the integrated chromatic dispersion compensator, one or more of the cascaded stages of the optical dispersion elements comprise a Mach-Zehnder interferometer (MZI). The ICDC may be completely built from cascaded MZIs, but may also comprise less defined structures. MZIs are standard structures on planar light wave circuits easily available and producable in a standardized way.

The invention also comprises a method for operating an integrated chromatic dispersion compensator according to the embodiment comprising a further tapping device as described above, characterized in that the additional feedback loop is adjusted to maximize the average optical power of the output signal of the lattice filter structure. This is the most simple fitting routine for the additional feedback loop connected to the further tapping device. A high optical output power secures a high signal to noise ratio of the output signal.

In another method for operating an inventive integrated chromatic dispersion compensator, the adaptation parameters are chosen in order to either maximize or minimize the average optical power of the corresponding tapped interstage signal, or to set the tapped interstage signal to a pre-selected level. These are easy to handle fitting procedures sufficient to obtain the advantages of the invention.

A further method for operating an inventive integrated chromatic dispersion compensator is characterized in that two interstage signals between two consecutive stages of optical dispersion elements are tapped from different parallel waveguides of the lattice filter structure, that the difference of the average optical power of said two tapped interstage signals is either maximized or minimized, or set to a pre-selected level. This method allows an exact

distribution of optical power between the two parallel waveguides of the lattice filter structure, in particular between two waveguide arms of a MZI. Thus, the time delay can be performed intentionally to a separated frequency part of an incoming signal.

5

A method in accordance with the invention is characterized in that the stages of the optical dispersion compensators not controlled by a feedback loop are controlled by an additional adaptation control device optimising a quality signal derived from the output signal. Typical quality signals comprise an electronic
10 eye monitor (i.e. the vertical width of an eye diagram), the bit error rate, FEC error count (forward-error correction), the spectral line of the detected signal, as well as the center frequency, the bandwidth and the average optical power of the detected signal. Typically, the stages controlled by the additional adaptation control device are tuned in parallel to keep the adaptation procedure simple.
15 Nevertheless, consecutive dithering of the control devices (i.e. phase shifters) can also be applied if a further reduction of the residual distortion is the major target. This parallel tuning generates the appropriate dispersion compensation. The tuning itself may be performed as a feedback dithering algorithm. Moreover, the stages controlled by the additional adaptation control device
20 comprise a phaseshifter, but preferably do not comprise delay lines.

Another method for operating an inventive integrated chromatic dispersion compensator is characterized in that the stages of the optical dispersion
25 elements not controlled by a feedback loop are controlled by an accessory control device, that a dispersion analyser determines the amount of dispersion of the input signal of the lattice filter structure, and that the data determined by the dispersion analyser is evaluated by the accessory control device for controlling the stages of the optical dispersion elements not controlled by a feedback loop. The tuning of the stages (typically the phaseshifters) not
30 controlled by a feedback loop generates the actual dispersion compensation,

e.g. on grounds of reading out a table. This feed-forward tuning procedure can do without a dithering algorithm and is thus very fast.

Further advantages can be extracted from the description and the enclosed
5 drawings. The features mentioned above and below can be used in accordance with the invention either individually or collectively in any combination. The embodiments mentioned are not to be understood as exhaustive enumeration but rather have exemplary character for the description of the invention.

10 Drawings

The invention is shown in the drawings.

Fig. 1 shows a connection scheme of an integrated optic residual dispersion
15 compensator with an additional adaptation control device for feed-back in accordance with the invention;

Fig. 2 shows a connection scheme of an integrated optic residual dispersion
20 compensator with an accessory control device for feed-forward in accordance with the invention.

In 40Gb/s DWDM systems (and also 160Gb/s systems) compensated by a DCF
module (dispersion compensating fiber) some or all wavelength channels might
experience penalty due to uncompensated residual chromatic dispersion which
25 might arise due to

- Temperature change of the transmission fiber (waveguide) in long links;
- Mismatch of transmission fiber dispersion slope and DCF dispersion slope;
- An economic installation of the DCF might prohibit any fine tuning of the DCF to be installed.

30

In all these cases the use of a dynamically adapting residual chromatic dispersion compensator (RCDC) is beneficial. Integrated optic circuits (e.g. Planar Lightwave Circuit: PLC) bear the potential of an economic realization for dispersion mitigation due to the possibility to realize many compensators on one chip. The application of a thermo-optic tunable RCDC was demonstrated in the last years, see K. Takiguchi, K. Okamoto, K. Moriwaki; J. Lightwave Technol. Vol. 14, No. 9, 1996, p. 2003-2011. A typical cascaded Mach-Zehner interferometer structure is shown in Fig. 1, box with reference number 1.

These structures need to be adjusted to the actual dispersion and also to the frequency spectrum to be transmitted. Many parameters have to be adjusted simultaneously, e.g. electrically tunable phase shifters 6, 9, 12, 14, 18. This bears the danger of many relative optima which can hardly be handled by a simple adaptation control merely verifying the output signal.

In accordance with the invention, "intermediate" optical signals are tapped out of the RCDC chip and are used for adaptation, not only the signal at the output port of the chip. With these tapped signals separate simple (low cost) feedback loops are formed to adjust only one phase shifter (here maximum adjustment of the average optical power is performed). Many local maxima are avoided. For the specific structure of an adaptive RCDC shown below we have:

Phaseshifters 6, 12, 18 are separately tuned to maximum average optical power, which can be accomplished by a simple dithering algorithm realized with low speed (i.e. inexpensive) electronics and photodiode.

Phaseshifters 9, 14 are tuned in parallel to generate the appropriate dispersion. This is done by observing the compensated signal at the output of the RCDC and maximizing its quality measured by a feedback signal. This can also be a dithering algorithm implemented in the adaptation control. The feedback signal can be electronic eye monitor, FEC error count, spectral line of detected signal

etc. Most of the feedback signals already known from PMD (polarization mode dispersion) compensation might be applicable.

Brief description of the preferred embodiments

5

The inventive integrated residual chromatic dispersion compensator shown in **Fig. 1** comprises a cascaded Mach-Zehnder interferometer structure, enclosed in a box indicated with reference number 1. Mach-Zehnder interferometers for themselves are known from the state of the art.

10

The inventive ICDC further comprises a structure for phase locking on channel wavelengths, enclosed in a box indicated with reference number 2.

15

The Mach-Zehnder interferometer structure 1 is an example of a lattice filter structure. Lattice filter structures generally comprise two parallel waveguide lines, alternatingly interrupted by parallel optical devices in each waveguide line (e.g. phaseshifters or delay loops) and crossover locations where the two waveguide lines may undergo coupling effects.

20

In the example given in Fig. 1, the input signal is fed into the upper input port 3a of a first 3dB coupler 3. The first 3dB coupler 3 and a second 3dB coupler 4, together with a delay line 5 of delay time τ and a phaseshifter 6 generating a phase shift of $\Delta\phi_1$ form a Mach-Zehnder interferometer. One signal outlet of the second 3dB coupler 4 (or the subsequent waveguide arm) is tapped with a tapping device 7, messaging signal characteristics into a feedback loop 8. Within the feedback loop 8, adaptation parameters are generated for the phaseshifter 6 in order to optimize the signal tapped by the tapping device 7.

25

30

Subsequent to the 3dB coupler 4, a phaseshifter 9 is disposed in the upper waveguide arm. This phaseshifter 9 is not controlled by a feedback loop of the structure for phase locking 2.

In the example given, the middle part of the ICDC comprises further 3dB couplers 10, 13, 16, a phaseshifter 12 parallel to a delay line 11 and controlled by a feedback loop 15, and a phaseshifter 14 not controlled by a feedback loop.

5

The last stage of the ICDC comprises a phaseshifter 18 parallel to a delay line 17 and a 3dB coupler 19. The upper output 21 of the coupler 19 delivers the output signal of the lattice filter structure, i.e. of the ICDC. The upper output 21 is tapped with a further tapping device 20a to provide the additional feedback
10 loop 20 with the necessary data to control the phaseshifter 18.

The upper output 21 is also tapped by a quality signal line 22 to provide a quality analyzer 23 with the necessary signal information. The results of the quality analysis is given to the additional adaptation control device 24 to
15 generate control parameters for the phaseshifters 9 and 14. These operation parameters may be used for tuning the ICDC to the actual dispersion 25 of the input signal of the lattice filter structure. Preferably, the phaseshifters 9, 14 are tuned in parallel to keep the tuning the least complex as possible. A simple way of tuning 25 can be performed by dithering the operation parameters and
20 analyze the effect on the quality parameter analyzed in the quality analyzer 23.

In Fig. 2, an alternative and inventive method for controlling the phaseshifters 9, 14 which are not controlled by feedback loops is illustrated. The input signal 26 of the lattice filter structure is tapped with line 27. The tapping position may
25 also be located at the upper input port 3a. A dispersion analyzer 28 determines the amount of dispersion which has corrupted the input signal 26 and gives this information to the accessory control device 29. The accessory control device 29 gives parameters for tuning the actual dispersion 30 of the input signal 26 to the phaseshifters 9, 14. These parameters may be obtained by reading out a table
30 stored in the accessory control device 29 which lists the most favorable values for the operation parameters of the phaseshifters 9, 14 in order to compensate

the prevailing dispersion of the input signal 26. In the most simple case, the phaseshifters 9, 14 are tuned in parallel. Reading out a table in the accessory control device is much easier and faster than performing dithering algorithms as in the embodiment of Fig. 1.

Claims

1. Integrated chromatic dispersion compensator for optical signals in
5 optical communication networks, comprising a plurality of cascaded
stages of optical dispersion elements arranged in the form of a lattice
filter structure,

characterized by
10
at least one tapping device (7) disposed between consecutive stages of
the optical dispersion elements for tapping inter stage signals, feeding
each tapped inter stage signal into a separate feedback loop (8, 15),
which in turn is feeding adaptation parameters into at least one of the
15 stages of the optical dispersion elements preceding the corresponding
tapping device (7) of the inter stage signal.
2. Integrated chromatic dispersion compensator according claim 1,
20 characterized in that the integrated chromatic dispersion compensator
comprises a plurality of tapping devices (7) disposed between several
stages of the optical dispersion elements for tapping inter stage signals.
- 25 3. Integrated chromatic dispersion compensator according claim 1,
characterized in that the stages of the of the optical dispersion elements
comprise tuneable phaseshifters (6, 9, 12, 14, 18), in particular
electrically and/or thermally tuneable phaseshifters.

4. Integrated chromatic dispersion compensator according to claim 3,
characterized in that each feedback loop (8, 15) controls only one single
phaseshifter (6, 12), preferably a phaseshifter (6, 12) which is arranged
5 in parallel to or in series with a delay element (5, 11).
5. Integrated chromatic dispersion compensator according claim 1,
characterized by a further tapping device (20a) for tapping the output
signal of the lattice filter structure, and feeding the tapped output signal
10 in an additional feedback loop (20), and feeding adaptation parameters
derived by the additional feedback loop (20) into at least one of the
stages of the optical dispersion elements preceding the further tapping
device (20a).
- 15 6. Integrated chromatic dispersion compensator according claim 1,
characterized in that one or more of the cascaded stages of the optical
dispersion elements comprise a Mach-Zehnder interferometer.
- 20 7. Method for operating an integrated chromatic dispersion compensator
according to claim 5, characterized in that the additional feedback loop
(20) is adjusted to maximize the average optical power of the output
signal of the lattice filter structure.
- 25 8. Method for operating an integrated chromatic dispersion compensator
according to claim 1, characterized in that the adaptation parameters
are chosen in order to either maximize or minimize the average optical
power of the corresponding tapped interstage signal, or to set the
tapped interstage signal to a pre-selected level.

9. Method for operating an integrated chromatic dispersion compensator according to claim 1, characterized in that two interstage signals between two consecutive stages of optical dispersion elements are tapped from different parallel waveguides of the lattice filter structure, that the difference of the average optical power of said two tapped interstage signals is either maximized or minimized, or set to a pre-selected level.
10. Method for operating an integrated chromatic dispersion compensator according to claim 1, characterized in that the stages of the optical dispersion elements not controlled by a feedback loop (8, 15) are controlled by an additional adaptation control device (24) optimizing a quality signal derived from the output signal of the lattice filter structure.
11. Method for operating an integrated chromatic dispersion compensator according to claim 1, characterized in that the stages of the optical dispersion elements not controlled by a feedback loop (8, 15) are controlled by an accessory control device (29), that a dispersion analyzer (28) determines the amount of dispersion which has distorted the input signal (26) of the lattice filter structure, and that the data determined by the dispersion analyzer (28) is evaluated by the accessory control device (29) for controlling the stages of the optical dispersion elements not controlled by a feedback loop (8, 15).

Abstract

An integrated chromatic dispersion compensator for optical signals in
5 optical communication networks, comprising a plurality of cascaded stages
of optical dispersion elements arranged in the form of a lattice filter
structure, is characterized by at least one tapping device (7) disposed
between consecutive stages of the optical dispersion elements for tapping
inter stage signals, feeding each tapped inter stage signal into a separate
10 feedback loop (8, 15), which in turn is feeding adaptation parameters into at
least one of the stages of the optical dispersion elements preceding the
corresponding tapping device (7) of the inter stage signal.

The invention presents a compact dispersion compensator that can
dynamically be adapted to varying dispersion situations and that is capable
15 of compensating the chromatic dispersion of a multitude of data channels at
the same time.

(Fig.1)

20

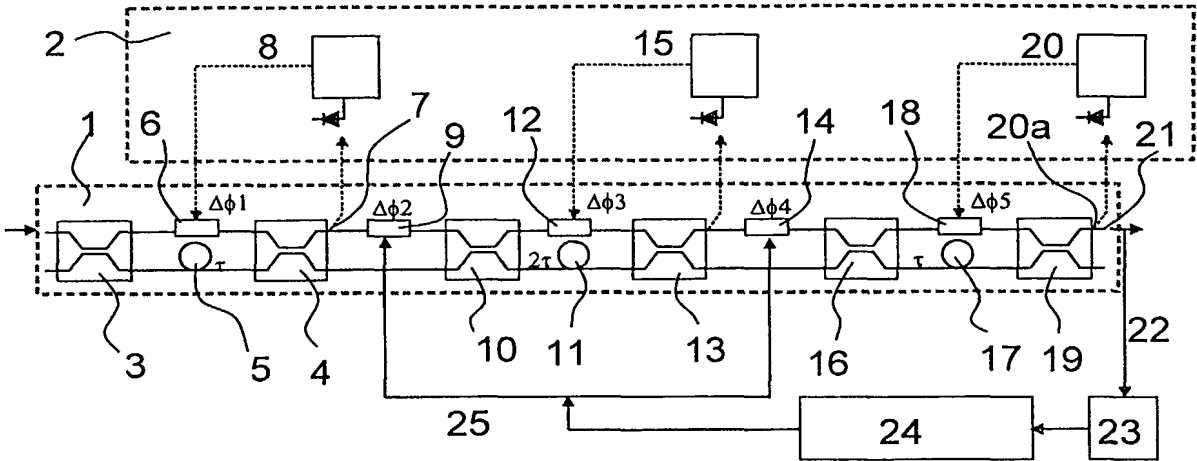


Fig. 1

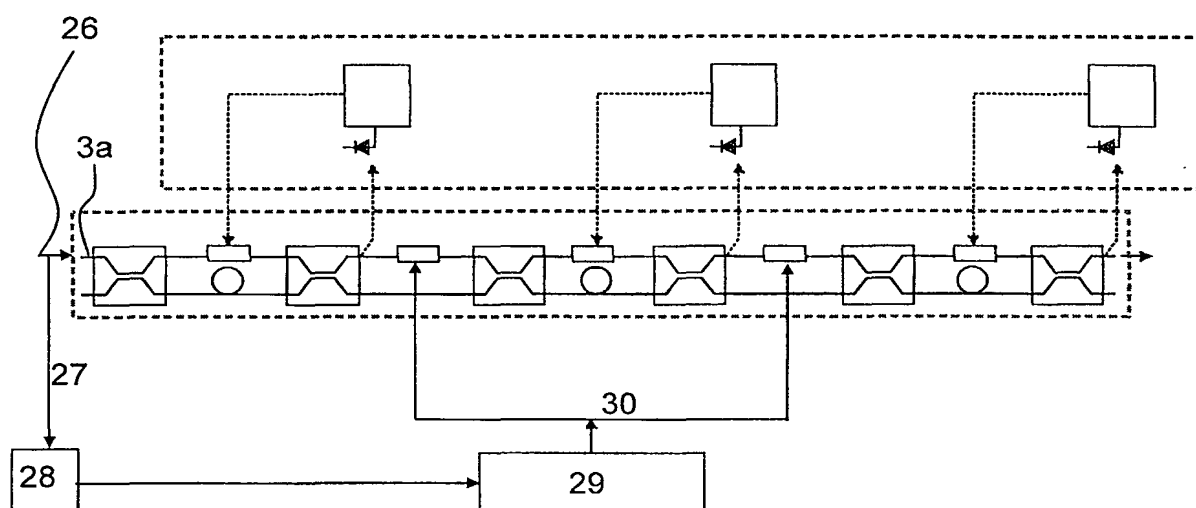


Fig. 2

113 548

Rd 13. Hn



P.B.5818 - Patentlaan 2
2280 HV Rijswijk (ZH)
☎ +31 70 340 2040
TX 31651 epo nl
FAX +31 70 340 3016

Europäisches Patentamt

Zweigstelle
in Den Haag
Recherchen-
abteilung

European Patent Office

Branch at
The Hague
Search
division

Office européen des brevets

Département à
La Haye
Division de la
recherche

KOHLER SCHMID + PARTNER
Patentanwälte GbR,
Ruppmannstrasse 27
70565 Stuttgart
ALLEMAGNE

Eingegangen		Prüfung	
am:	06.03.2003	not:	
vorhergeht:	sd	not:	

Eingang bei ZPL	
10. MRZ 2003	
Term.	
Bearb.	

12.3.03

Prüfungskammer

Datum/Date

06.03.03

Zeichen/Ref./Réf.

A 183 EP

Anmeldung Nr./Application No./Demande n°/Patent Nr./Patent No./Brevet n°.

02360234.5-2415-

Anmelder/Applicant/Demandeur/Patentinhaber/Proprietor/Titulaire

ALCATEL

COMMUNICATION

The European Patent Office herewith transmits as an enclosure the European search report for the above-mentioned European patent application.

If applicable, copies of the documents cited in the European search report are attached.

☒ Additional set(s) of copies of the documents cited in the European search report is (are) enclosed as well.

The following specifications given by the applicant have been approved by the Search Division:

☒ abstract

☐ title


☐ The abstract was modified by the Search Division and the definitive text is attached to this communication.

The following figure will be published together with the abstract:

1

REFUND OF THE SEARCH FEE

If applicable under Article 10 Rules relating to fees, a separate communication from the Receiving Section on the refund of the search fee will be sent later.





DOCUMENTS CONSIDERED TO BE RELEVANT

Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
D,A	TAKIGUCHI K ET AL: "DISPERSION SLOPE EQUALIZER FOR DISPERSION SHIFTED FIBER USING A LATTICE-FORM PROGRAMMABLE OPTICAL FILTER ON A PLANAR LIGHTWAVE CIRCUIT" JOURNAL OF LIGHTWAVE TECHNOLOGY, IEEE. NEW YORK, US, vol. 16, no. 9, 1 September 1998 (1998-09-01), pages 1647-1656, XP000786638 ISSN: 0733-8724 * abstract * * page 1647, right-hand column, line 6 - line 11 * * page 1647, right-hand column, line 31 - page 1648, left-hand column, line 2 * * figure 1 *	1-11	H04B10/18 G02B6/34
A	EP 0 997 751 A (LUCENT TECHNOLOGIES INC) 3 May 2000 (2000-05-03) * page 3, line 1 - line 5 * * page 3, line 24 - line 26 * * page 3, line 35 - line 39 * * page 5, line 3 - line 5 * * page 7, line 35 - line 38 * * figures 9A,9B *	1-11	TECHNICAL FIELDS SEARCHED (Int.Cl.7) H04B G02B
A	PATENT ABSTRACTS OF JAPAN vol. 018, no. 106 (P-1697), 21 February 1994 (1994-02-21) & JP 05 303019 A (NIPPON TELEGR & TELEPH CORP), 16 November 1993 (1993-11-16) * abstract *	1-11	
The present search report has been drawn up for all claims			
Place of search THE HAGUE		Date of completion of the search 11 February 2003	Examiner Reville, L
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document			

1000

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 02 36 0234

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.
The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

11-02-2003

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
EP 0997751	A	03-05-2000	US 6289151 B1	11-09-2001
			EP 0997751 A2	03-05-2000
			JP 2000151513 A	30-05-2000
<hr/>				
JP 05303019	A	16-11-1993	NONE	
<hr/>				

